


樹脂型

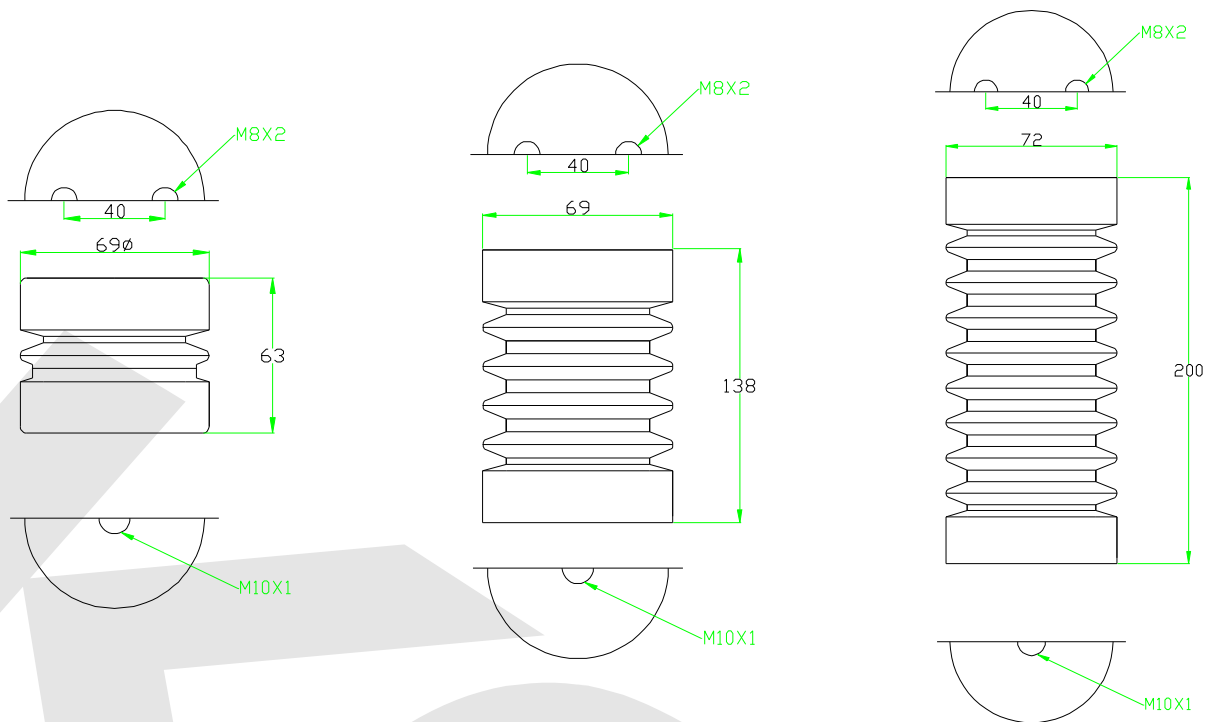

型式 TYPE number		KM-3	KM-6	KM-12	KM-24	KM-36
額定電壓 Voltage Rating	kV	3.3	6.6	12	24	36
延面洩漏距離 Leakage distance	mm	105	130	140	210	370
商用周波耐電壓(乾燥1分鐘) Low-frequency withstand voltage Dry,1 Min	kV	16	22	28	36	70
衝擊耐電壓(乾燥狀態) Impulse withstand(Dry)	kV	45	60	75	95	170
懸掛強度 Suspension strength	lb	2000	2000	2000	2000	2000
拉伸強度 Tensile strength	lb	4500	4500	4500	4500	4500
扭力強度 Torsional strength	lb	2000	2000	2000	2000	2000
壓縮強度 Compression strength	lb	10000	10000	10000	10000	10000
淨重 Net weight	kg	0.4		0.8	1.12	

凱麟電機有限公司

地址：台北縣土城市青雲路669之2號

電話：(02)2262-3726

傳真：(02)2262-9575

http://www.kcco.com.tw

E-mail：kcco@kcco.com.tw