


低壓電纜固定架 cable bracket

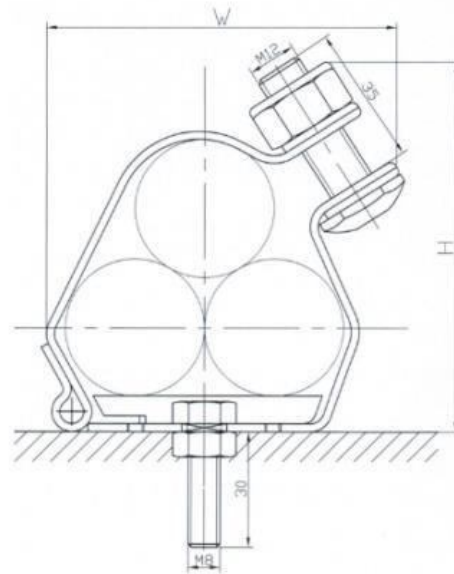

Fengfan Trefoil Cleats

Part Number	Cable Range				Dimensions			
	Min. Dia.		Max. Dia.		H		W	
	mm	in.	mm	in.	mm	in.	mm	in.
FF-T1323	13	0.51	23	0.91	73	2.87	68	2.68
FF-T2125	21	0.83	25	0.98	75	2.95	72	2.83
FF-T2329	23	0.91	29	1.14	80	3.15	79	3.11
FF-T2531	25	0.98	31	1.22	83	3.27	82	3.23
FF-T2733	27	1.06	33	1.30	84	3.31	85	3.35
FF-T2935	29	1.14	35	1.38	89	3.50	90	3.54
FF-T3238	32	1.26	38	1.50	92	3.62	96	3.78
FF-T3541	35	1.38	41	1.61	98	3.86	100	3.94
FF-T3844	38	1.50	44	1.73	100	3.94	106	4.17
FF-T4248	42	1.65	48	1.89	104	4.09	113	4.45
FF-T4551	45	1.77	51	2.01	107	4.21	120	4.72
FF-T4753	47	1.85	53	2.09	110	4.33	122	4.80
FF-T4955	49	1.93	55	2.17	113	4.45	125	4.92
FF-T5157	51	2.01	57	2.24	115	4.53	127	5.00
FF-T5359	53	2.09	59	2.32	118	4.65	135	5.31
FF-T5561	55	2.17	61	2.40	122	4.80	138	5.43
FF-T5763	57	2.24	63	2.48	125	4.92	141	5.55
FF-T5965	59	2.32	65	2.56	126	4.96	145	5.71

Part Number	Cable Range				Dimensions			
	Min. Dia.		Max. Dia.		H		W	
	mm	in.	mm	in.	mm	in.	mm	in.
FF-T6167	61	2.40	67	2.64	131	5.16	148	5.83
FF-T6369	63	2.48	69	2.72	134	5.28	153	6.02
FF-T6571	65	2.56	71	2.80	139	5.47	155	6.10
FF-T6773	67	2.64	73	2.87	143	5.63	156	6.14
FF-T6975	69	2.72	75	2.95	146	5.75	161	6.34
FF-T7177	71	2.80	77	3.03	150	5.91	164	6.46
FF-T7379	73	2.87	79	3.11	154	6.06	166	6.54
FF-T7581	75	2.95	81	3.19	157	6.18	170	6.69
FF-T7783	77	3.03	83	3.27	160	6.30	174	6.85
FF-T7985	79	3.11	85	3.35	162	6.38	178	7.01
FF-T8187	81	3.19	87	3.43	168	6.61	181	7.13
FF-T8389	83	3.27	89	3.50	172	6.77	185	7.28
FF-T8896	88	3.46	96	3.78	180	7.09	195	7.68
FF-T96103	96	3.78	103	4.06	189	7.44	203	7.99
FF-T103111	103	4.06	111	4.37	198	7.80	206	8.11
FF-T111119	111	4.37	119	4.69	207	8.15	215	8.46
FF-T119128	119	4.69	128	5.04	216	8.50	223	8.78

凱麟電機股份有限公司

地址：新北市土城區青雲路669之2號

電話：(02)2262-3726

傳真：(02)2262-9575

http://www.kcco.com.tw

E-mail：kcco@kcco.com.tw

